



XP-43 SL

"Step into the light"

Security Light™

(Patent Pending)

Motion Detector

PIR / Security Light™ operates as a 100 lb pet immune detector with *industry-first* features:

★ **LIGHTS YOUR PATH - SAFETY**

★ **PROVIDES EMERGENCY BACK UP LIGHTS**

★ **NIGHT PHOTOCCELL FUNCTION**

★ **INTRUDER DETERRENT LIGHTING**

Aleph America Corporation
4700 Aircenter Circle,
Reno Nevada, 89502 USA
Phone 775 827 8000
Fax 775 827 8044

PASSIVE INFRARED DETECTOR with Security Light™

100lbs PET IMMUNE

XP-43SL


ALEPH®

SPECIFICATIONS


Power Supply	10.6 to 16 VDC (Normal 12VDC)
Current Consumption	68mA max. at Security Light ON condition
PIR Detector	Dual-Element
PIR Detection Range	Standard - 40 × 56 ft (12 × 17m)
	Long range lens (Option) - 100 × 8 ft (31 × 2m)
Pulse Count	2 or 4 pulses (selectable)
Warm-up Period	38sec max
Alarm Period	approx. 2sec
Alarm Indicator	Red LED
Security Light™ (White LEDs & Red LED)	Stays on for approx. 10 sec
	White LED only comes on in dark areas (less than approx. 50 lx)
Walk Test	Blinks of Alarm indicator
Alarm Output	N C dry contact 30VDC 0.1A max.
Tamper Output	N C dry contact 30VDC 0.3A max.
Sensitivity Adjustment	See Section 10
Mounting Height	4.9 to 8.5ft (1.5 to 2.6m)
Operating Temperature	+14 to +122° F (-10 to +50°C)
Environment Humidity	95% max.
Dimensions (H×W×D)	3.9in. × 2.5in × 1.7in (98.0mm × 64.0mm × 42.5mm)
Weight	3.1oz (88g)

ALEPH reserves the right to change the specification and design without prior notice as part of its continuing program of product improvement

DETECTION AREA

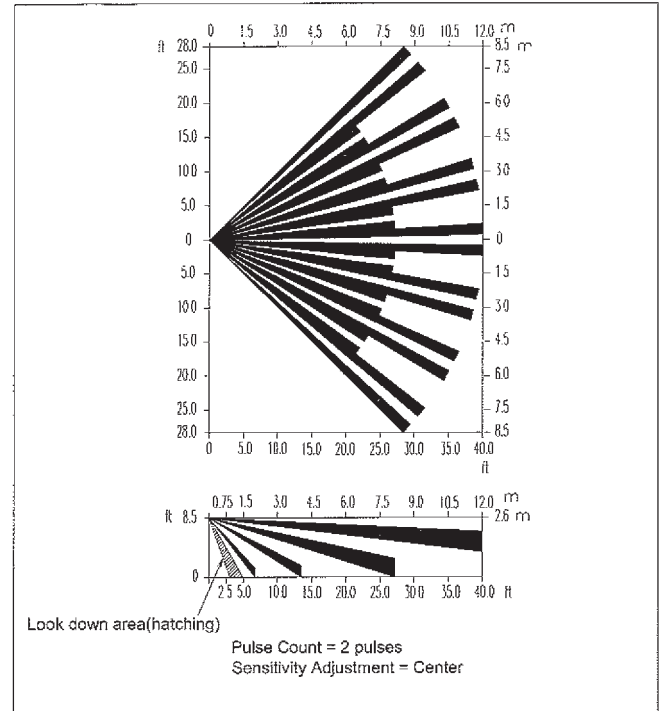

DESCRIPTION

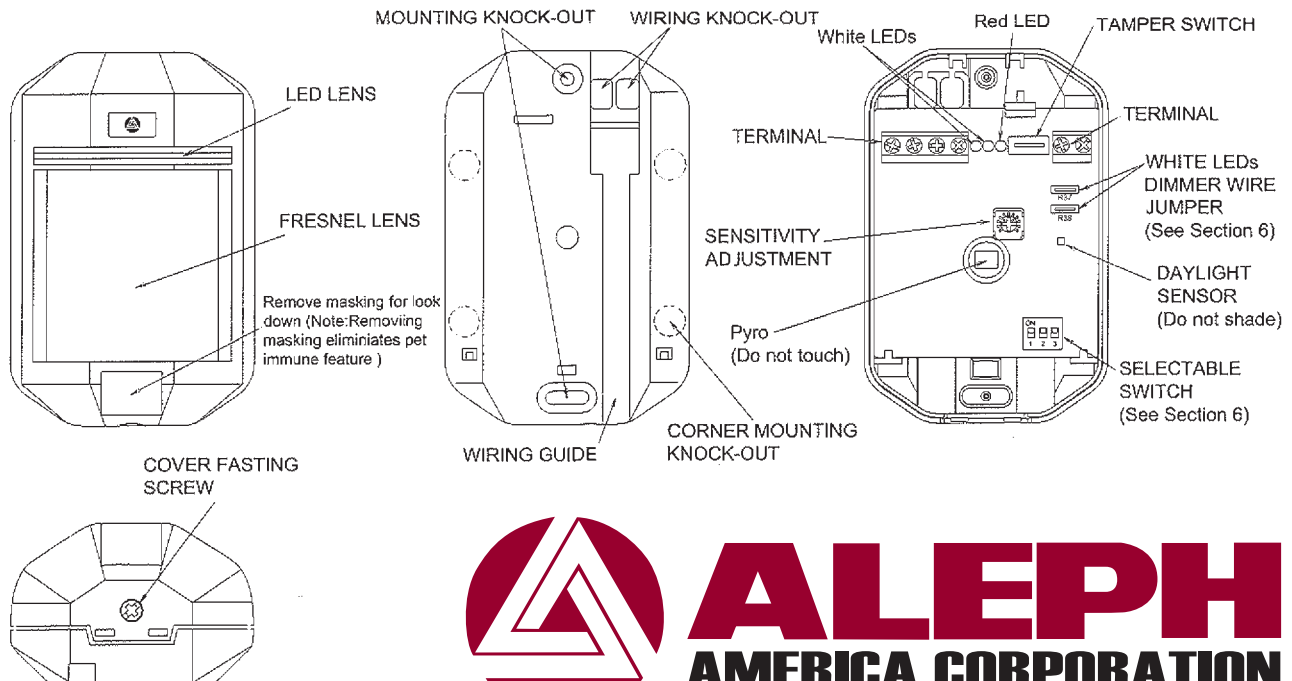

ALEPH®

AMERICA CORPORATION

4700 AIRCENTER CIRCLE, RENO, NV 89502
 (775) 827-8000 • FAX (775) 827-8044
www.aleph-usa.com